


(屋内壁掛形)
MATSUSHITA
BNB-8103 相当品
450W x500H x125D

(屋内壁掛形)
MATSUSHITA
BNS-358W2 相当品
500W x1000H x175D

表中の記号は、下記による。 回路番号は、下記による。

MCB : 配線用 遮断器	901- : 1φ2W-100V [専用回路]
ELB : 漏電遮断器	101- : 1φ2W-100V [照明回路]
RCB : リモコンブレーカ	201- : 1φ2W-200V [---/---]
M C : 電磁接触器	301- : 1φ2W-100V [コンセント回路]
M S : 電磁開閉器	401- : 1φ2W-200V [---/---]
R-Ry1 : リモコン・リレ (1P-20A)	501- : 1φ2W-100V [発電照明回路]
R-Ry2 : リモコン・リレ (2P-20A)	601- : 1φ2W-200V [---/---]
R-TR : リモコントランス	701- : 1φ2W-100V [発電コンセ回路]
TM1 : 24時間タイマ	801- : 1φ2W-200V [---/---]
TM2 : (停電補償付)	D1- : DC2W-100V [直流回路]
AS : 自動点滅器	1- : 3φ3W-200V [動力回路]
COS : 切替スイッチ	R1- : [リモコン回路]
W : 積算電力計	A- : 1φ3W-100/200V [分岐回路]

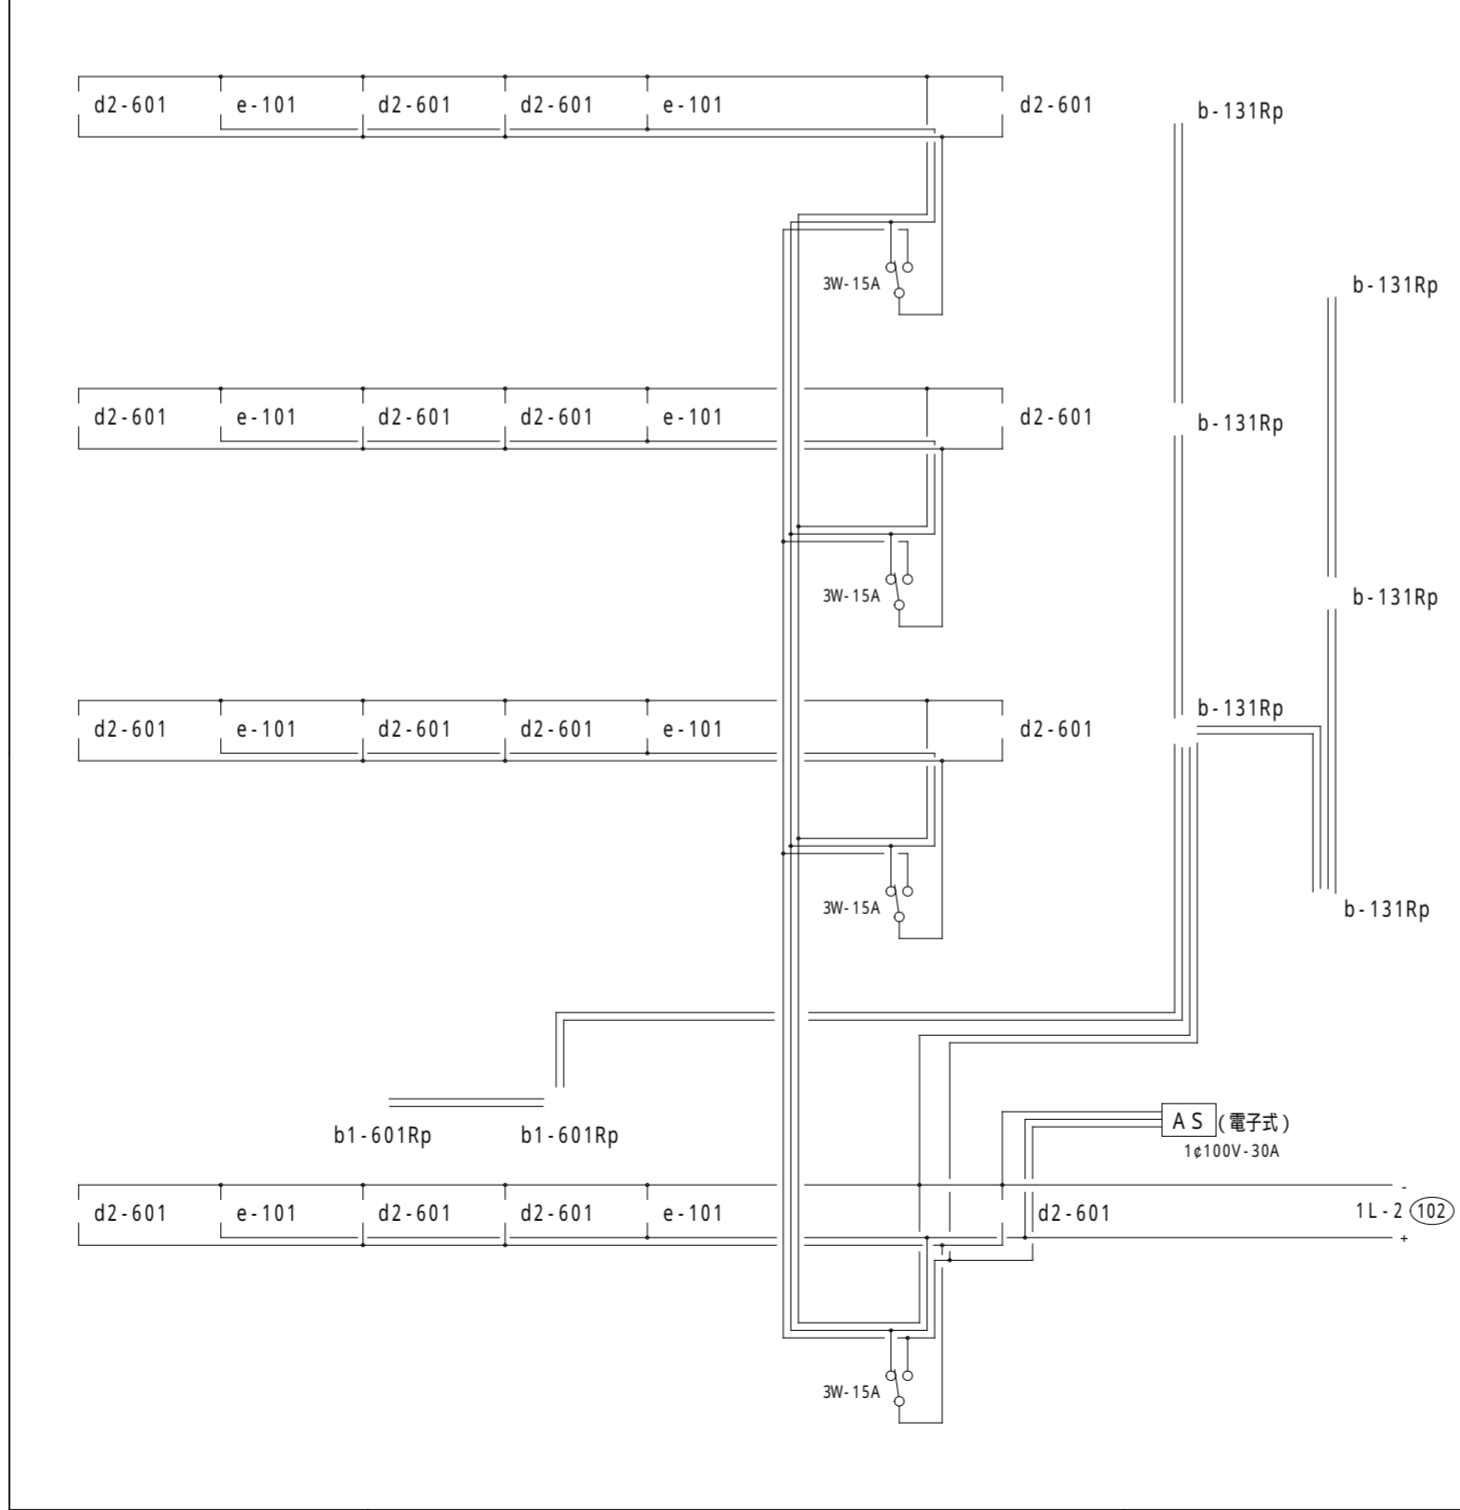

b	ブラケット・ライト		b1	ブラケット・ライト	b2	ブラケット・ライト																																																			
180x180x195D		260Wx140Hx137D		260Wx140Hx137D																																																					
b-131Rp	FDL 13W-1		b1-601Rp	IL 60W-1	b2-401Rp	IL 40W-1																																																			
BVW5251 相当品			WL2623 相当品		WL1410 相当品																																																				
C	シ・リング・ライト (住戸内)	C		シ・リング・ライト																																																					
726x310x98D		728x728x70D																																																							
C-203	FL 20W-3	FP2493HE 相当品	C-206	FL 20W-6	FP2266WE 相当品																																																				
d1	直付シ・リングライト	d2	直付ダウンライト (住戸内)	V	V形直付シ・リングライト																																																				
270φx150D		140φx120D		KV2251-1H 相当品																																																					
d1-601	IL 60W-1	d2-401	IL 40W-1	V-201	FL 20W-1	KV2251-1H 相当品																																																			
LC1513W 相当品		LC1903W 相当品																																																							
e	埋込ダウンライト (非常照明器具) (電池内蔵型)																																																								
<table border="1"> <tr> <td>照度</td> <td colspan="3">1.0Lx</td> <td colspan="3">0.5Lx</td> <td colspan="3">0.25Lx</td> </tr> <tr> <td>取付高さ (m)</td> <td>2.0</td><td>2.5</td><td>2.7</td> <td>2.0</td><td>2.5</td><td>2.7</td> <td>2.0</td><td>2.5</td><td>2.7</td> </tr> <tr> <td rowspan="2">配光の種類</td> <td colspan="2">A</td> <td rowspan="2">方向</td> <td colspan="3">O-A</td> <td colspan="3">A</td> </tr> <tr> <td>0</td><td>2.8</td><td>2.9</td><td>2.9</td><td>3.5</td><td>3.9</td><td>3.9</td><td>4.2</td><td>4.8</td><td>5.0</td> </tr> <tr> <td></td> <td colspan="10">M=0.75</td> </tr> </table>							照度	1.0Lx			0.5Lx			0.25Lx			取付高さ (m)	2.0	2.5	2.7	2.0	2.5	2.7	2.0	2.5	2.7	配光の種類	A		方向	O-A			A			0	2.8	2.9	2.9	3.5	3.9	3.9	4.2	4.8	5.0		M=0.75									
照度	1.0Lx			0.5Lx			0.25Lx																																																		
取付高さ (m)	2.0	2.5	2.7	2.0	2.5	2.7	2.0	2.5	2.7																																																
配光の種類	A		方向	O-A			A																																																		
	0	2.8		2.9	2.9	3.5	3.9	3.9	4.2	4.8	5.0																																														
	M=0.75																																																								
e-201	IL 20W-1	LDB2021 相当品																																																							
X	避難口誘導灯 (パネル) (電池内蔵型)																																																								
X-101		FL 10W-1																																																							
		KST1231-1L 相当品																																																							
<p>【注】照明器具記号は、下記による。</p> <p>A-402e</p> <p>器具形状</p> <p>ランプW数</p> <p>ランプ本数</p> <p>e: 非常照明器具 Rp: 防雨形 Mp: 防湿形 p: パイプ吊り c: チェーン吊り G: ガード付き Ex: 耐圧防爆形 Ee: 安増防爆形 Ea: 耐酸形 Es: 耐塩形 Em: 防虫形</p>																																																									